PERMITS & APPLICABLE CODES

All construction and methods will meet standard acceptable practice and comply to all applicable ordinances and restrictions adopted by the City of Jonesboro, Arkansas, and the Arkansas State Fire Prevention Code.

GENERAL NOTES

- 1. Contractor shall verify all dimensions and conditions prior at the job site prior to commencing construction. Discrepancies shall be brought to the attention of the architect before proceeding with the work.
- 2. Contractor shall obtain the latest set of drawings, including any revisions, before stating
- 3. No changes or substitutions shall be made without prior written approval of the architect. 4. All construction shall meet the requirements of local ordinances, the International Building Code & the International Residential Code, current editions.
- 5. All dimensions must be verified in the field. Any major discrepancies or discrepancies precipitating a material change of the intended design must be brought to the attention of the
- 6. Written dimensions take precedence over scaled dimensions. Do not scale reproductions as it may not accurately reflect the published scale of the drawings.
- 7. This project has been drawn using Autodesk Revit 2012. Precise measurements, not
- included in the published set, may be obtained by contacting the architect.
- 8. The architect, on behalf of the owner, reserves the right to reject any work that is defective or of poor workmanship or work that deviates from the specifications of these documents. 9. Drawings are to be issued to subcontractors in complete sets so that all architectural details
- affecting their work is included.
- 10. The architect reserves the right to check and approve all shop drawings and does not accept any responsibility for the interpretation of these plans by others.
- 11. Shop drawings of all specialty items including, but not limited to, cabinetry, steelwork, etc. shall be submitted to the architect for approval prior to fabricating these items.
- 12. All sections and details shall be considered typical and apply for the same and similar
- situations throughout the building, unless otherwise noted. 13. Should the contractor or subcontractor require details not provided in these documents, the
- architect should be contacted immediately. The architect will provide clarification in written or graphic form as necessary.





"I HEREBY CERTIFY THAT THESE PLANS AND SPECIFICATIONS HAVE BEEN PREPARED BY ME, OR UNDER MY SUPERVISION. I FURTHER CERTIFY THAT TO THE BEST OF MY KNOWLEDGE THESE PLANS AND SPECIFICATIONS ARE AS REQUIRED BY LAW AND IN COMPLIANCE WITH THE ARKANSAS


FIRE PREVENTION CODE FOR THE STATE OF ARKANSAS 2007 EDITION."

TIM MADDOX

CODE INFORMATION CITY OF JONESBORO, ARKANSAS CODES: 2007 ARKANSAS FIRE PREVENTION CODE 2006 ARKANSAS STATE PLUMBING CODE 2006 ARKANSAS STATE GAS & FUEL CODE 2008 NATIONAL ELECTRIC CODE B, BUSINESS OCCUPANCY CLASSIFICATION: TYPE V-B TYPE OF CONSTRUCTION: ALLOWABLE HEIGHT & BUILDING AREA (TABLE 503): ALLOWABLE HEIGHT 2 STORY, 40'-0" ACTUAL HEIGHT 1 STORY, 27'-0" ALLOWABLE AREA 9,000 SF ACTUAL AREA 2,392 SF FIRE RESISTANCE RATING FOR BUILDING ELEMENTS (TABLE 601): STRUCTURAL FRAME BEARING WALLS (EXTERIOR) BEARING WALLS (INTERIOR) NON BEARING WALLS FLOOR CONSTRUCTION ROOF CONSTRUCTION MEANS OF EGRESS: MAXIMUM TRAVEL DISTANCE TO EXIT 200 FEET (TABLE 1016.1) MAXIMUM DEAD END CORRIDOR LENGTH 20 FEET (SECTION 1017.3) 44 INCHES (SECTION 1017.2) MINIMUM CORRIDOR WIDTH MINIMUM CLEAR OPENING OF EXIT DOORS 32 INCHES (SECTION 1008.1.1) OCCUPANT LOAD: **BUSINESS AREAS** 2392 SF/ 100 GROSS = 24 (23.92) TOTAL OCCUPANT LOAD 24 EXIT WIDTH (TABLE 1005.1): PROVIDED 0.2 INCHES x 24 OCCUPANTS = 4.8 INCHES 108 INCHES PLUMBING REQUIREMENTS: -WATER CLOSETS REQUIRED -LAVATORIES REQUIRED -SERVICE SINK REQUIRED TOTAL 1 -DRINKING FOUNTAINS REQUIRED TOTAL 1

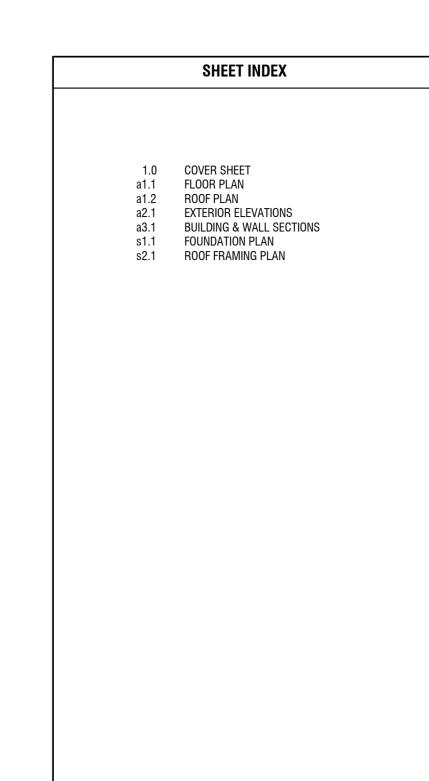

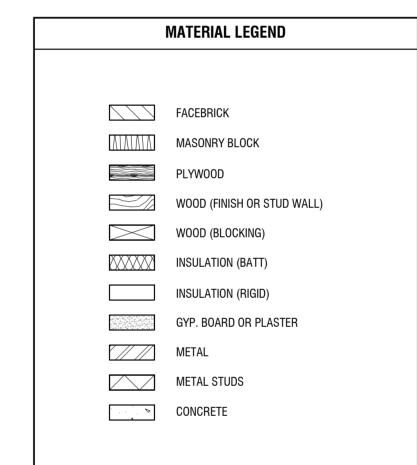

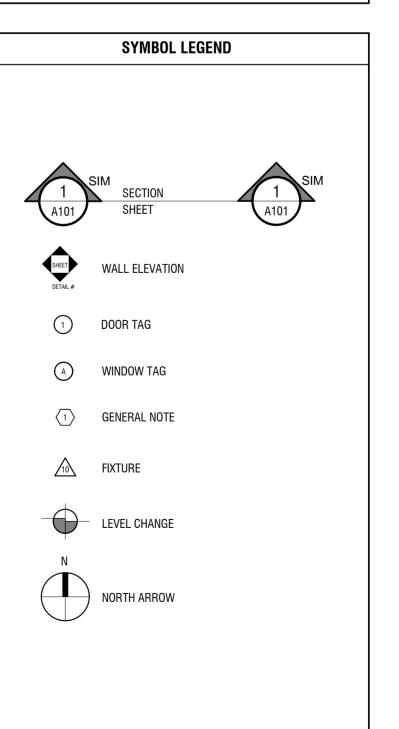

23612

09.30.2013


deMx architecture,
1 East Center Street Suite 290 Fayetteville, Arkansas 72

FLOOR PLAN1/4" = 1'-0"

GENERAL NOTES: FLOOR PLAN

LEAVE OUT IN THE CONCRETE SLAB FOR PLUMBING & ELECTRICAL STUB UPS. 6X6 POST, SEE STRUCTURAL DRAWINGS, W/ STONE BASE LINE OF ROOF OVERHANG

59'-0"

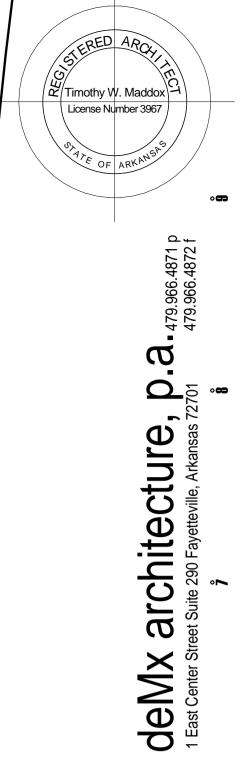


PERMIT SET 09.30.2013 23612

GENERAL NOTES: ROOF PLAN

MARK DESCRIPTION

ARCHITECTURAL COMPOSITION SHINGLES OVER 30# BUILDER'S FELT & 5/8" ROOF DECKING AWNING BY OWNER PREFINISHED METAL GUTTER PREFINISHED METAL DOWNSPOUT EXTERIOR STUD WALL BELOW

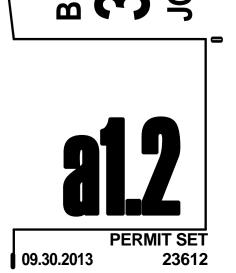












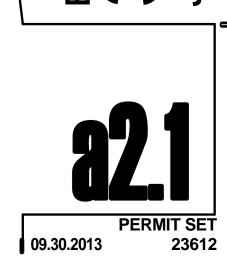

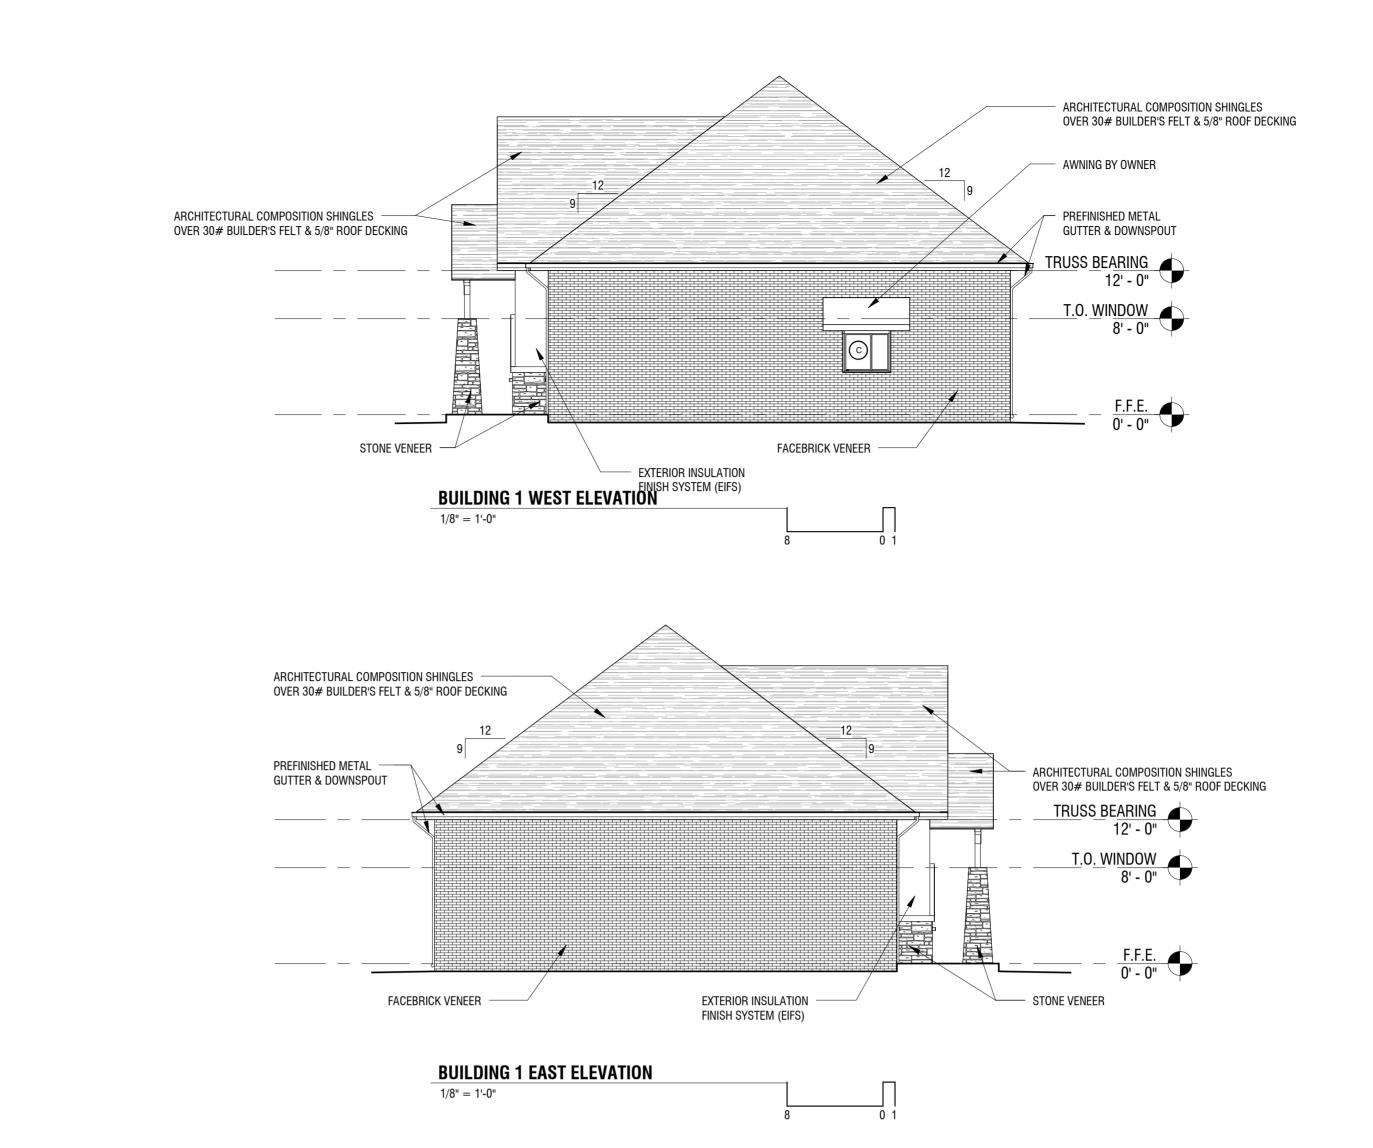

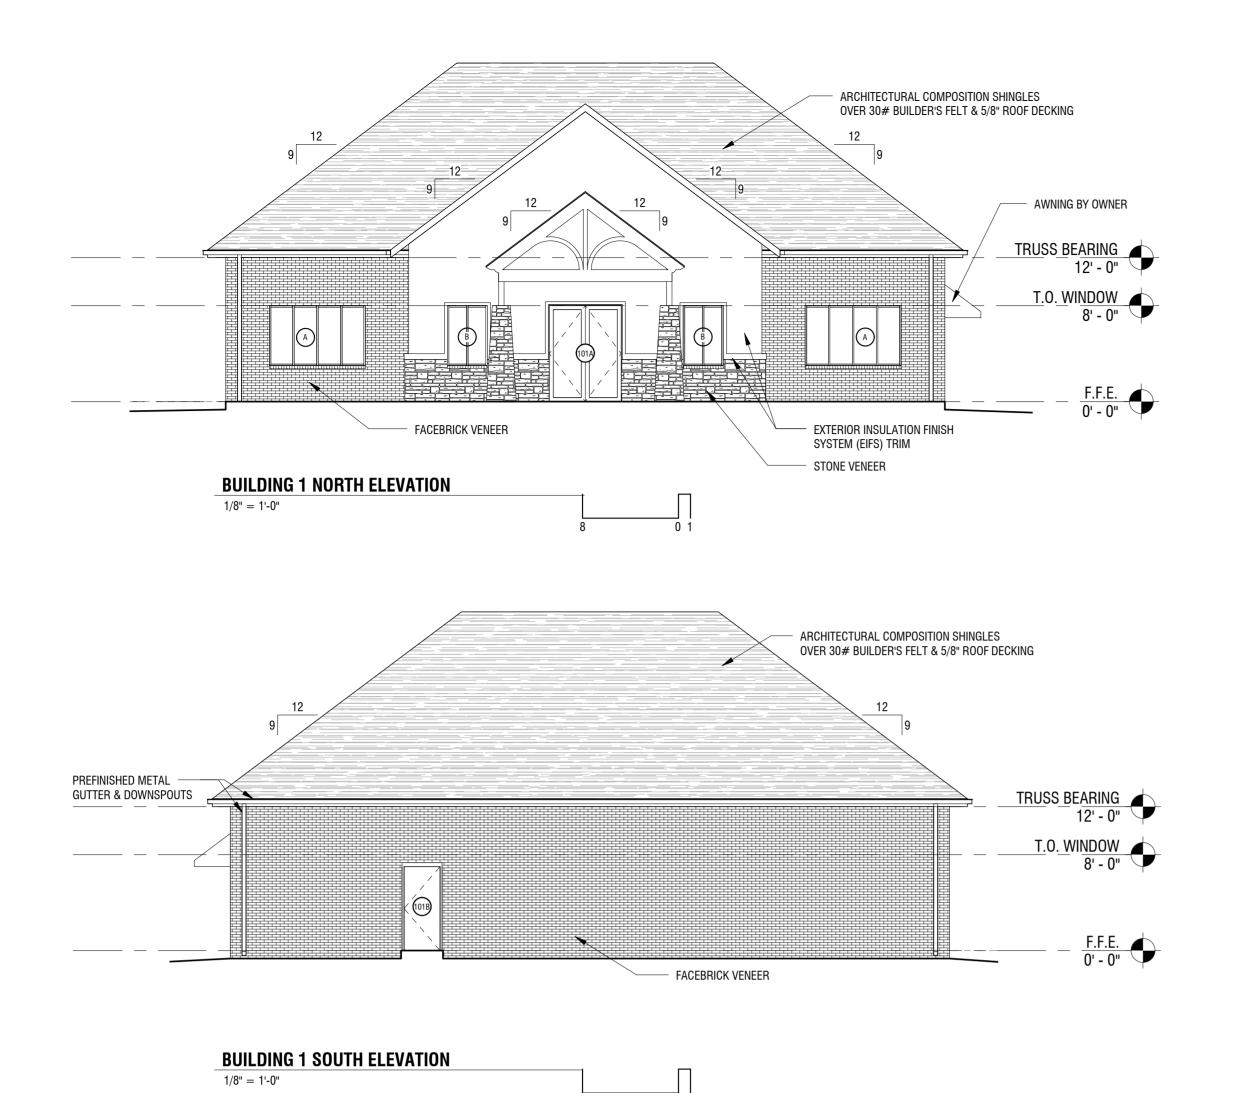

D2 INSULATED HOLLOW METAL DOOR, PAINTED FINISH

FRAME TYPE


0' - 1 3/4"

D1 FULL GLASS ALUMINUM DOOR (BRONZE)

DOOR & FRAME ELEVATIONS


1/4" = 1'-0"


DOOR SCHEDULE

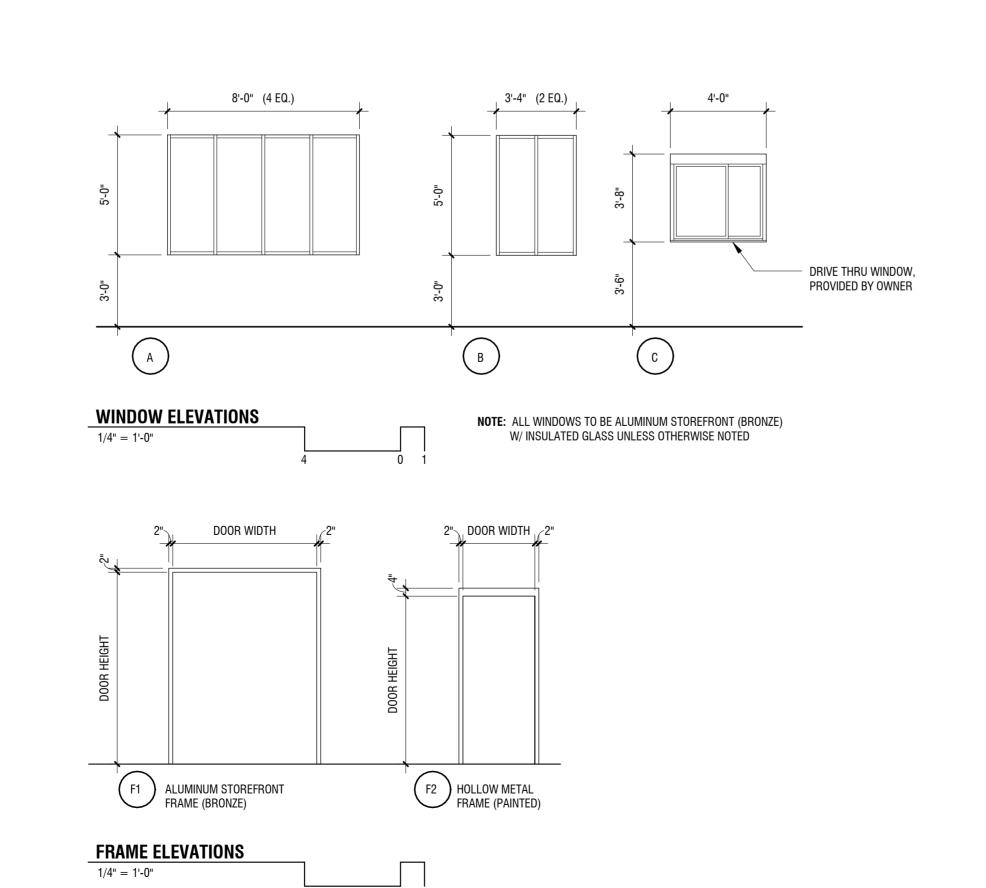







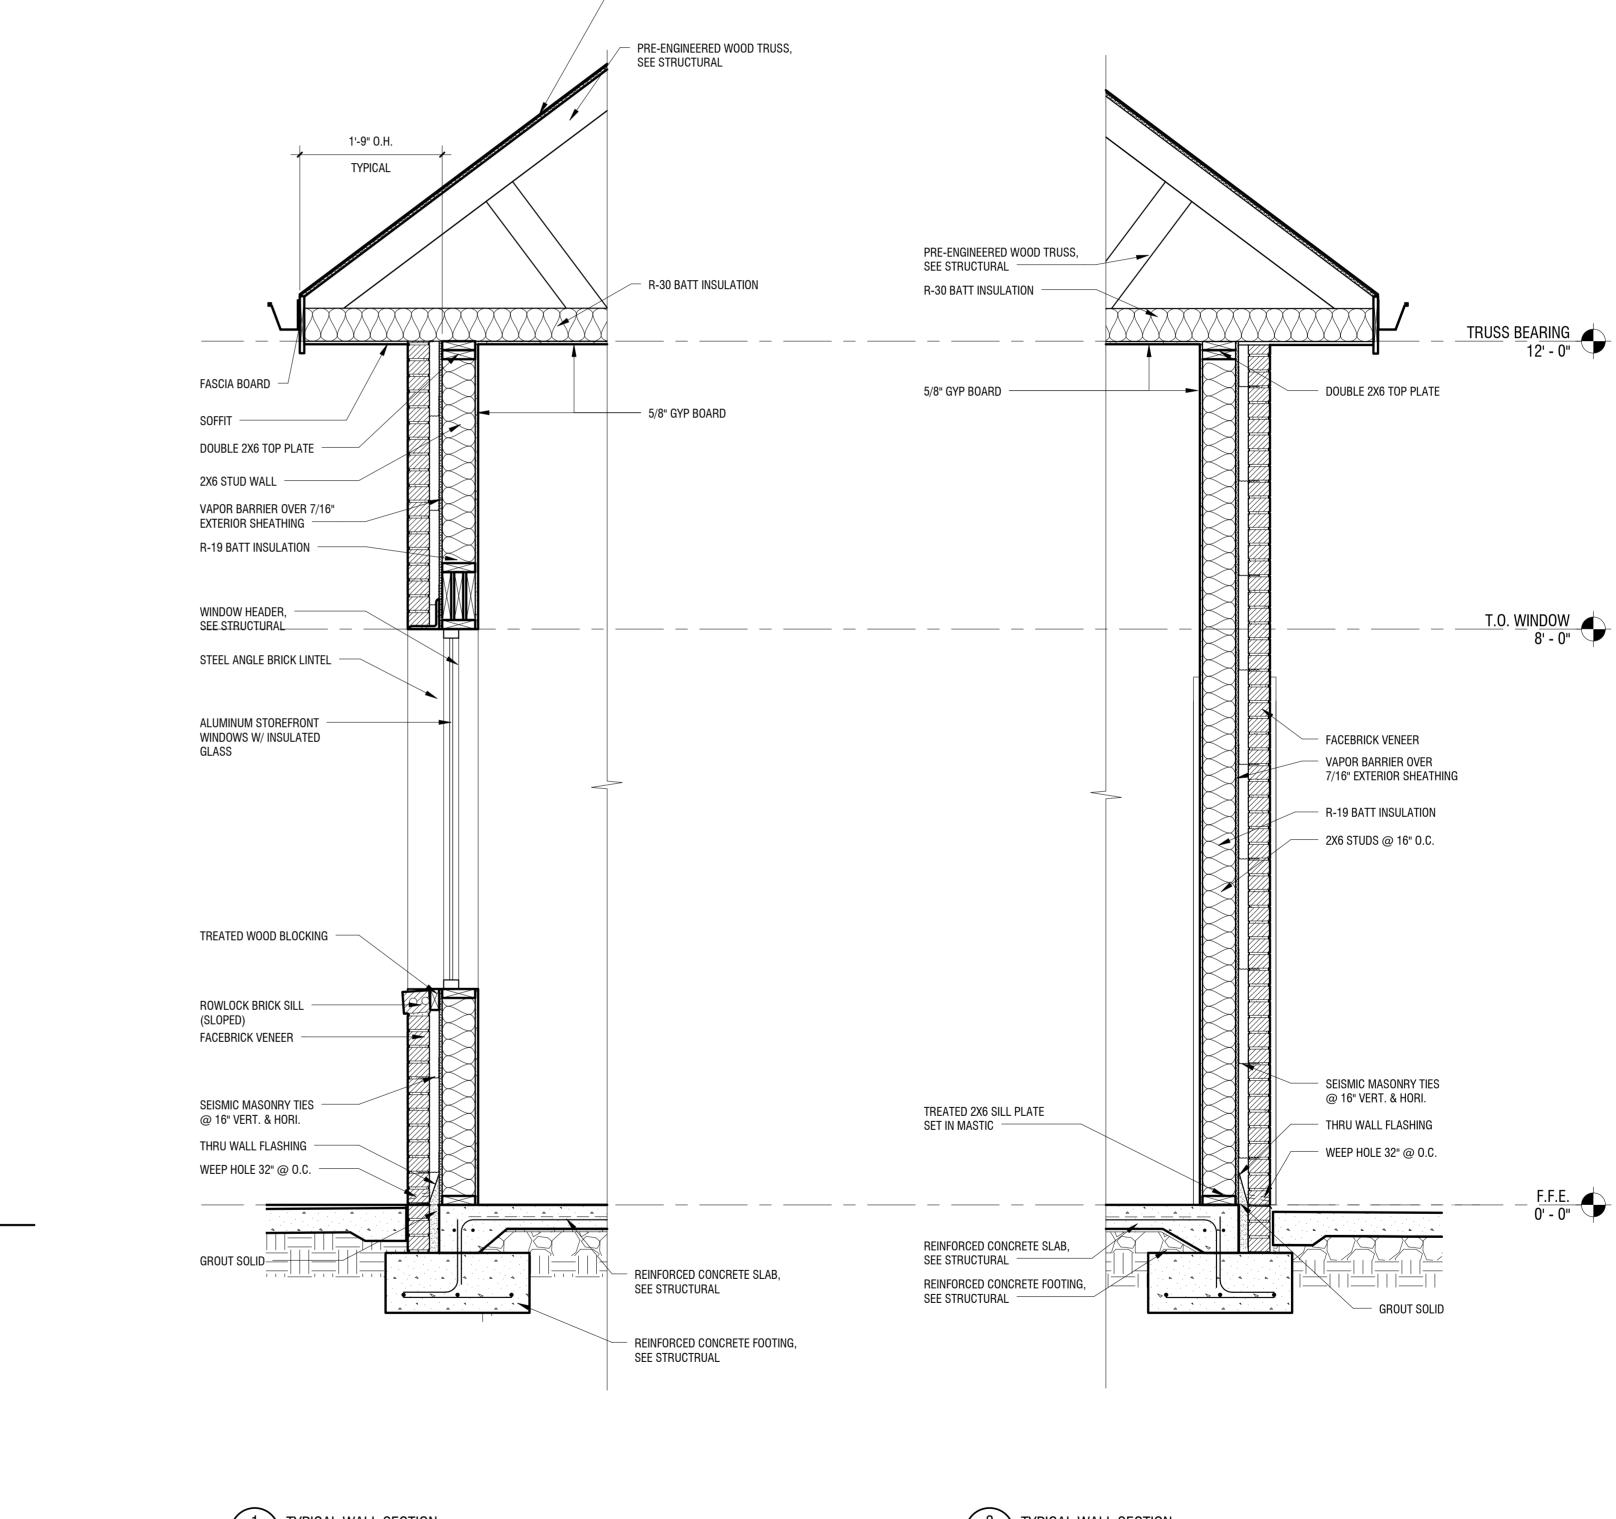

- ARCHITECTURAL COMPOSITION SHINGLES OVER 30# BUILDER'S FELT & 5/8" ROOF DECKING

